


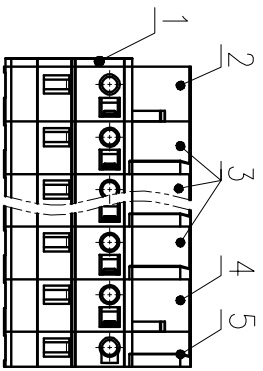

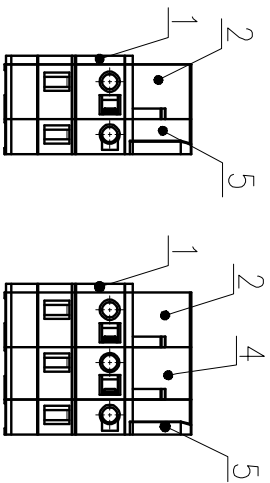


Pitch Range		In mm				Nominal Dimension				Range		In mm	
Over	Under	Over	Under	Over	Under	Over	Under	Over	Under	Over	Under	Over	Under
6	10	10	24	30	60	100	150	0.1	1/10				
T0	10	T0	24	T0	60	T0	150						
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°					

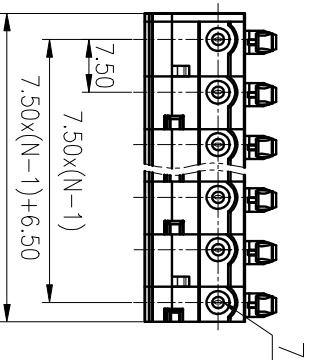

ITEM	NAME OF PART	MATERIAL	NOTES
1	Cover	PA66	UL94V-0
2	Side housing 1	PA66	UL94V-0
3	Middle housing 1	PA66	UL94V-0
4	Middle housing 2	PA66	UL94V-0
5	Side housing 2	PA66	UL94V-0
6	Spring	Stainless steel	
7	Clamp	Copper alloy	Sn plated

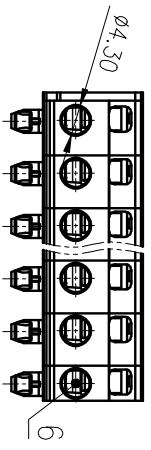

MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD:	
CHKD:	
DRAFT: Gong YZ	2016.12.10
DRAFT: SIZE: A4	mm / inch
TYPE: CUSTOMER DRAWING	SCALE: 1:1
NAME:	8EDGKC-7.5-XXP-11-1001A(H)
DRAWING NO.:	8EDGKC-7.5-C02
REV:	T0
REV:	1/1

过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III / 3	III / 2	II / 2
额定电压 / 电涌 / Rated Voltage (V) / Current (A)	400 / 20	/	/
额定脉冲电压 (KV) / Rate Impulse Voltage (KV)	4	/	/
线径范围 (导线和线束) / Wire Range (rigid and flexible) (mm ² / AWG)	0.2~2.5 / 22~14		
间距 / Pitch (mm) / 螺距范围 / Poles	7.50 / N=02~12P		
剥线长度 / Stripping length (mm)	9~10		
使用温度范围 / Operating temperature (°C)	-40~+105		
符合RoHS环保要求 / Conform to RoHS	Yes		
标准颜色编号 / Standard color number:	428C		
PANTONE:			
SURFACE:	/		

NINGBO DEGSON ELECTRICAL CO., LTD
 宁波高松电子有限公司

REV	ECN	DESCRIPTION	DRAFT	DATE