


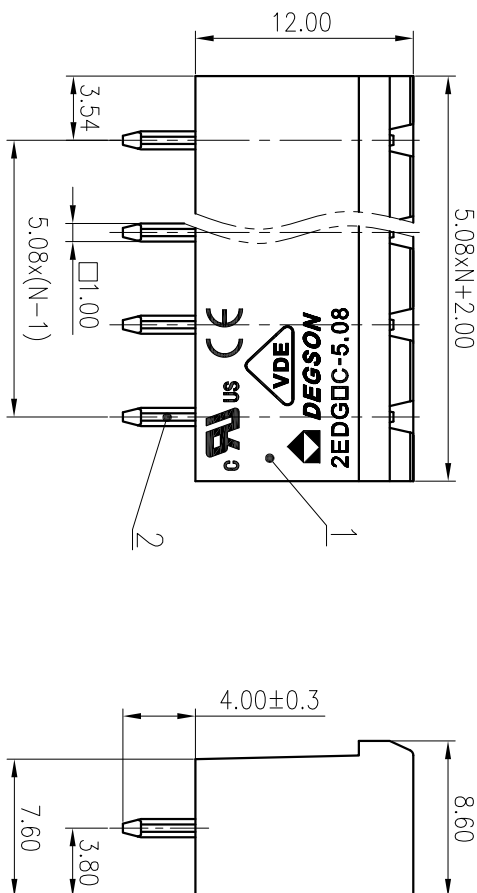


公差表/General Tolerances(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.50	±2.20	±2.50	±2.50	±2.50	±2'

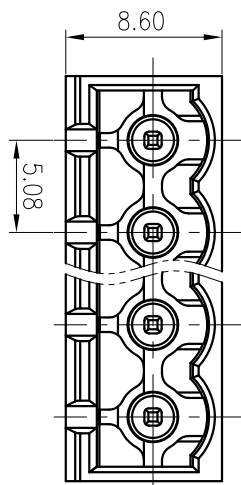

文 管 中  
研 发 心  
2020.05.13  
(仅限内部使用, 对外无效)

PCB LAYOUT

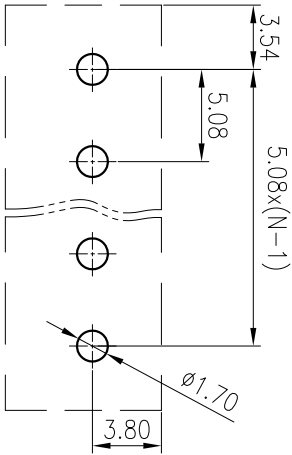

2	Pin header	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:		B	C
UL 标准/UL Standard:			D
额定电压/电流/Rated Voltage(V)/Current(A)		300/15	300/10
VDE 标准/VDE Standard:			
过压类别/Overvoltage Category/污染等级/ Pollution Degree		III/3	III/2
额定电压/电流/Rated Voltage(V)/Current(A)		/	320/20
额定脉冲电压(KV)/Rote Impulse Voltage(KV)		/	4
间距/Pitch(mm)/线数/道间距/Poles		5.08/N=02~24P	/
使用温度范围/Operating temperature(°C)		-40~+105	/
符合RoHS环保要求/Conform to RoHS		Yes	/

MATERIAL: /

MAT NO.: /

STATUS: /

APPD: LanChh 2020.05.13

CHKD: GongYin 2020.05.13

DRAFT: LY 2020.05.13

DEGSON® 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: 2EDGVC-5.08-XXP-1Y-100A(H)

DRAWING NO.: 10001579

TYPE: CUSTOMER DRAWING

SURFACE: /

SIZE: A4

SCALE: 2.5:1

SHEET 1/1

REV T0

DATE

DESCRIPTION

REV	ECN	DESCRIPTION	DRAFT	DATE