

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

Technical characteristics:
 Specifications
 DIN EN 60 664
 DIN EN 61 984



Inserts

01. Number of contacts : 9
02. Rated Current : 5A
03. Rated Voltage : 50V
04. Pollution degree : 3
05. Rated impulse voltage : 0.8kV
06. Insulation resistance : $\geq 10\Omega$
07. Material: Polycarbonate
08. Limiting temperatures : $-40^{\circ}\text{C}\sim+125^{\circ}\text{C}$
09. Flammability acc. to UL94: V0
10. Mechanical working life (mating cycles) : ≥ 500

Contacts

01. Material: Copper alloy
02. Surface: hard-silver plated
: hard-Gold plated
03. Contact resistance : $\leq 3\text{m}\Omega$
04. Terminal: Crimp terminal
05. Wire gauge : 0.09-0.82mm² (AWG 28-18)
06. Rohns Compliance

Note: Crimp contact pins should order separately

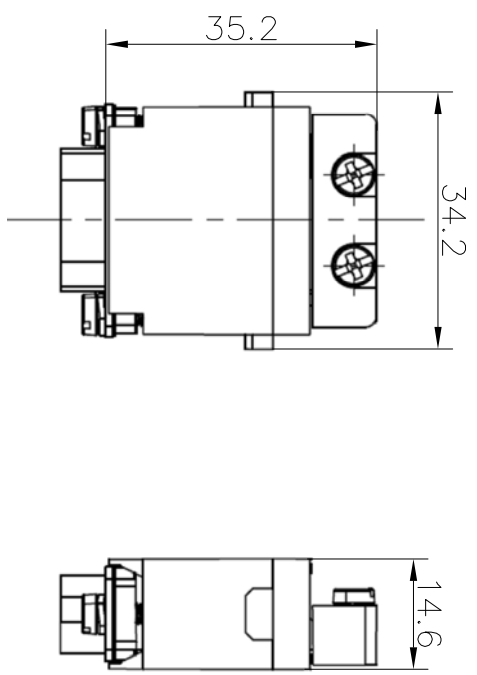

DETACHED LISTS			
PART NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD	
APPD:		宁波高松电子有限公司	
CHKD:		DKE-009-MC	
DRFT:	Mf.yong 2016.08.22	TITLE: CUSTOMER DRAWING	REV DO-1
		DRAWING NO.:	SHEET 1/1
		THIRD ANGLE PROJECTION	SCALE 1.5:1
		DO NOT SCALE DRAWING	