
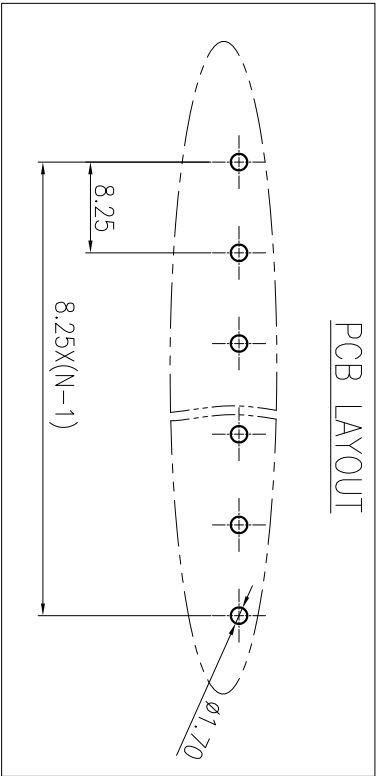

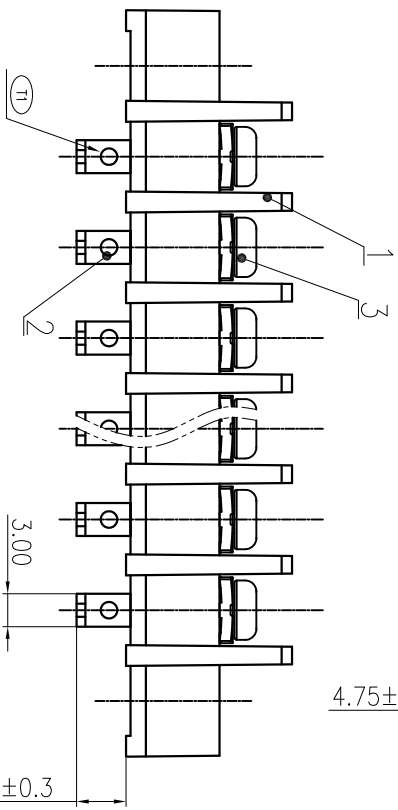


公差/General Tolerances(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10															
~	3	~	6	~	10	~	18	~	30	~	50	~	80	~	120	~	180	~	250	~	315	~	400	~	500	~	>500	~	1/10	
±	0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.47	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2														

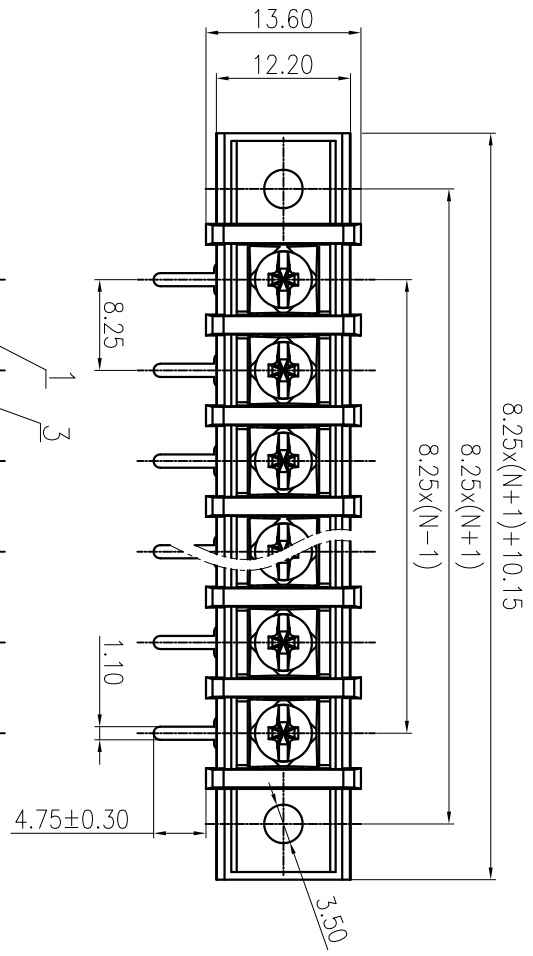

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Pin header	Copper alloy	M3/Sn Plated
3	Screw	Steel	M3/Ni Plated

UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)	300/20	/	300/10
额定电流/Rated Current(A)	300/20	/	300/10
IEC 标准/IEC Standard:	过压类别/Overvoltage Category/污染等级/ Pollution Degree		
额定电压/电涌/Rated Voltage(V)/Current(A)	III/3	III/2	II/2
额定脉冲电压/电涌/Rate Impulse Voltage(KV)	300/32	300/32	600/32
额定脉冲电流/电涌/Rate Impulse Voltage(KV)	5	5	5
额定扭矩/Torque Tightening(N.m/Lb.in)	M3, 0.5/4.43		
线径范围/硬线和软线/Wire Range(rigid and flexible)(mm <sup>2</sup> /AWG)	4.0/22~12		
间距/Pitch(mm)/线数范围/Poles	8.25/N=2~28P		
剥线长度/Stripping length(mm)	8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

SURFACE: /

MATERIAL: /  
 MAT NO.: /  
 STATUS: /  
 APPD: /  
 CHKD: /

NAME: **DEGSON**® NINGBO DEGSON ELECTRICAL CO., LTD  
 宁波高松电子有限公司

DRAWING NO.: DG35R-C03  
 TYPE: CUSTOMER DRAWING  
 SCALE: 1.5:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE
1	16-0215	Move the hole up	XXD	2018.07.11