



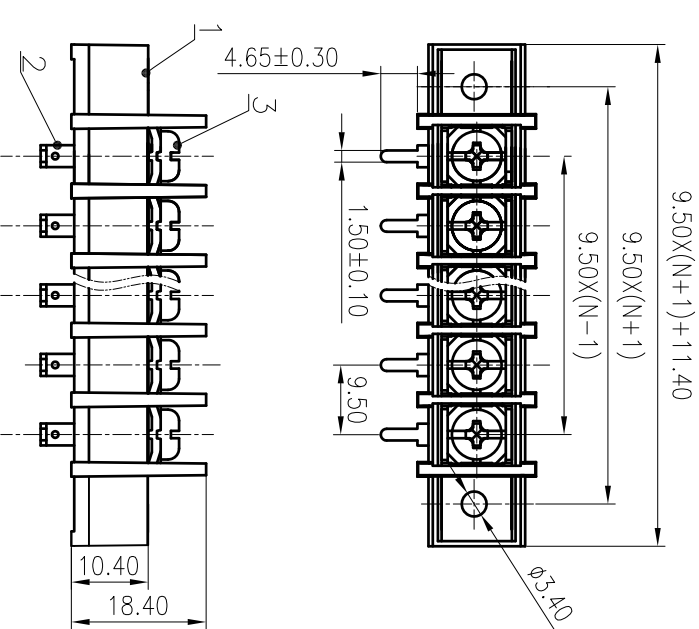


Pitch range in mm	Nominal dimension range					
	In mm		In mm			
to over	to over	to over	to over	to over	to over	to over
6	10	30	60	100	150	∇
10	24	30	60	100	150	
15	24	30	60	100	150	
15	24	30	60	100	150	

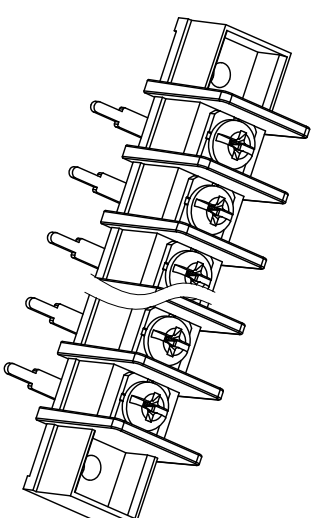

PCB LAYOUT

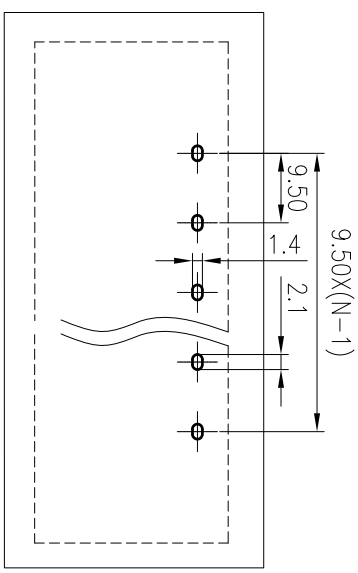

3	Screw	Steel	Ni Plated
2	Pin header	Copper alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准	UL Standard:	B	C
额定电压/电流/Rated Voltage(V)/Current(A)	300/25	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	500/32	600/32	1000/32
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6	6	6
螺丝扭矩/Torque Tightening(N·m/Lb·in)	M4, 1.2/10.53		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.34~4/22~12		
间距/Pitch(mm)/线数范围/Poles	9.50/N=02~24P		
剥线长度/Stripping length(mm)	8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

SURFACE: /

MATERIAL: /

MAT NO.: /

STATUS: work

APPD: /

CHKD: /

DRFT: XieZhp 2020.05.25

宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: DG45R-A-XXP-1Y-00A(H)

DRAWING NO.: DG45R-C32

TYPE: CUSTOMER DRAWING

SCALE: 1:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE