
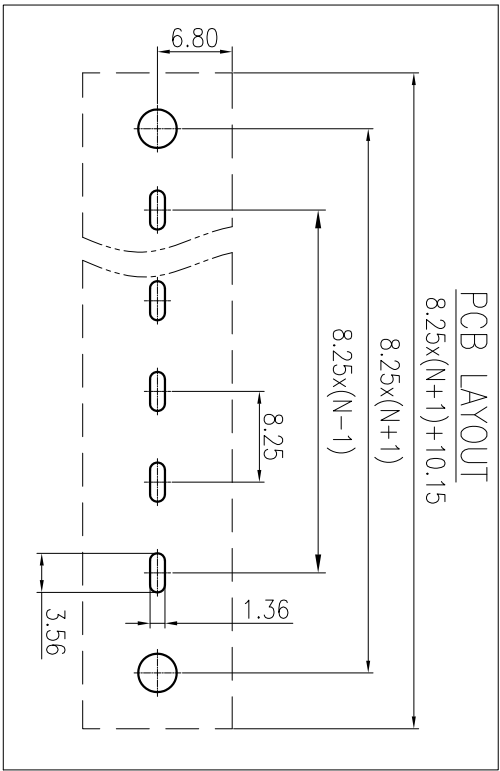
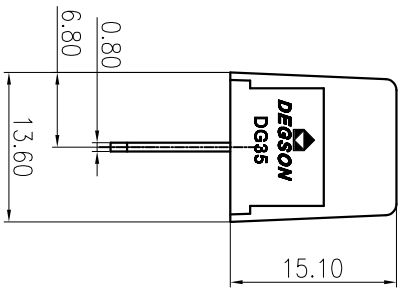


公差/General Tolerances(mm)		公差/General Tolerances(mm)	
0	>3	>6	>10
~	~	~	~
3	6	10	18
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.15	±1.60	±2.20
±2.50	±3.15	±4.00	±5.00
±1/10	±1/10	±1/10	±1/10

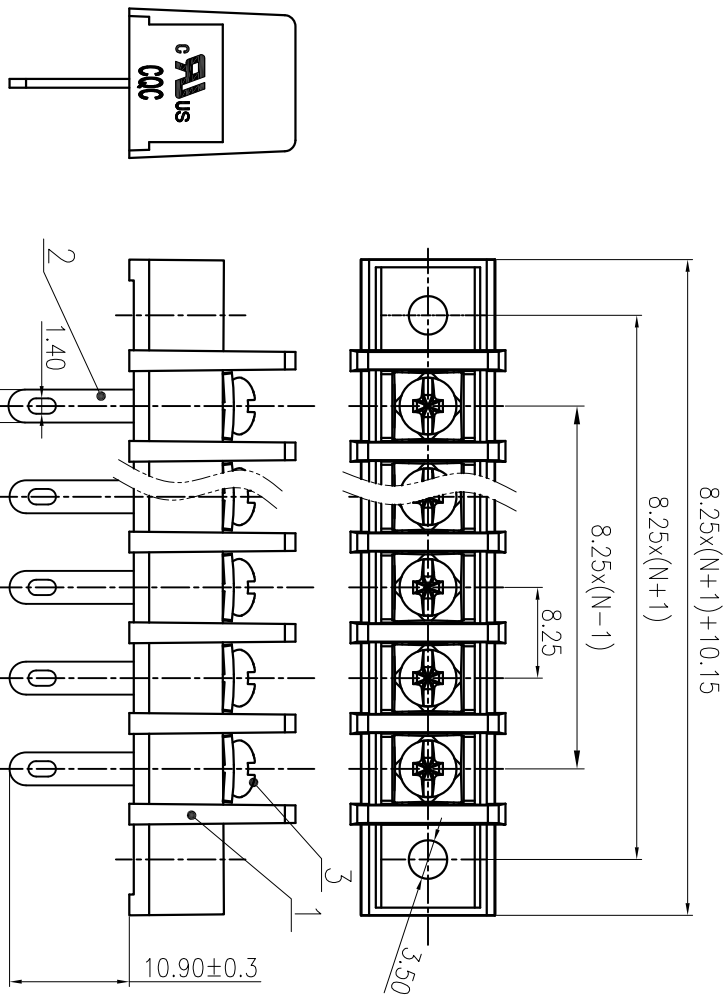

PCB LAYOUT

8.25x(N+1)+10.15

8.25x(N+1)

8.25x(N-1)

8.25

6.80

1.36

3.56

REV	ECN	DESCRIPTION	DRAFT	DATE

MATERIAL: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

DRAFT: CenMZ 2020.05.25

SIZE: A4

SURFACE: /

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD

NAME: DG35H-A-XXP-1Y-00A(H)

DRAWING NO.: DG35H-C03

TYPE: CUSTOMER DRAWING

ITEM	NAME OF PART	MATERIAL	NOTES
3	Screw	Steel	M3/Ni Plated
2	Pin header	Copper alloy	M3/Sn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/20	/	300/10
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污染等	III/3	III/2	II/2
级/ Pollution Degree	300/32	300/32	600/32
额定电压/电压/Rated Voltage(V)/Current(A)	M3, 0.5/4.43	M3, 0.5/4.43	M3, 0.5/4.43
拧紧扭矩/Torque Tightening(N·m/Lb·in)	4.0/22~12	4.0/22~12	4.0/22~12
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	8.25/N=2~24P	8	8
可焊/ Pitch(mm)/线数范围/Poles	-40~+105	Yes	Yes
剥线长度/Stripping length(mm)	Yes		
使用温度范围/Operating temperature(°C)			
符合RoHS环保要求/Conform to RoHS			

NAME: DG35H-A-XXP-1Y-00A(H)

DRAWING NO.: DG35H-C03

TYPE: CUSTOMER DRAWING

SCALE: 1.5:1 SHEET 1/1

REV TO

1/1