
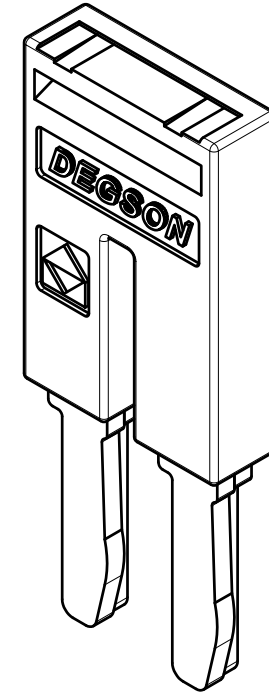
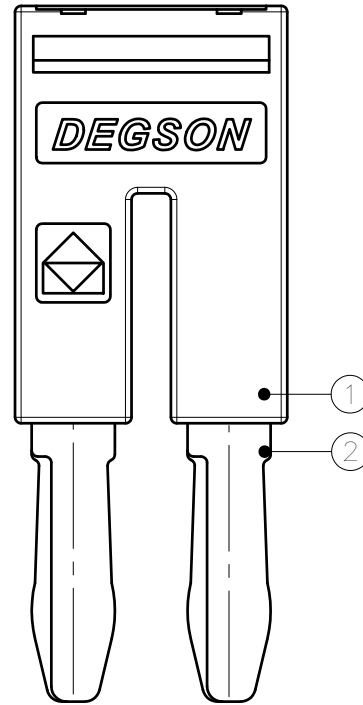
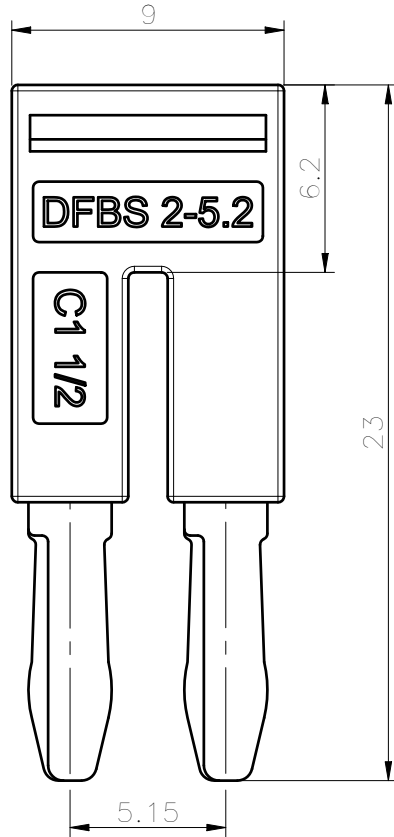


| 未注公差/General tolerances(mm) | | | | | | | | | | | 0.1/10 | | |
|-----------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--------|-------|-------|
| 0 | >3 | >6 | >10 | >18 | >30 | >50 | >80 | >120 | >180 | >250 | | >315 | >400 |
| ±0.12 | ±0.18 | ±0.22 | ±0.26 | ±0.31 | ±0.37 | ±0.57 | ±0.80 | ±0.93 | ±1.05 | ±1.15 | ±1.60 | ±2.20 | ±2.50 |
| ~3 | ~6 | ~10 | ~18 | ~30 | ~50 | ~80 | ~120 | ~180 | ~250 | ~315 | ~400 | ~500 | >500 |



| ITEM | NAME OF PART | MATERIAL | NOTES |
|------|--------------|----------|-----------|
| 2 | Current | Copper | Sn_plated |
| 1 | Housing | PA66 | UL94V-0 |

| | |
|----------------------------------|----------|
| 间距/Pitch(mm)/线数范围/Poles | 5.2/2P |
| 使用温度范围/Operating temperature(°C) | -40~+105 |
| 符合 RoHS 环保要求/Conform to RoHS | Yes |

| | |
|----------------|------------|
| | |
| APPD: Peng M | 2022.06.15 |
| CHKD: GAO WG | 2022.06.15 |
| DRFT: Huang RJ | 2022.06.15 |

| | | | |
|-----------------------------|--------------------------|------------------|--------------|
| MATERIAL: / | SURFACE: / | | |
| MAT NO./REV: / | MAT STATUS: / | | |
| NAME DFBS2-5.2-1Y-00A(H) | | | |
| DRAWING NO. / | TYPE CUSTOMER DRAWING | DRAWING STATUS / | SHEET 1/1 |

| REV | ECN | DESCRIPTION | DRFT | DATE |
|-----|-----|-------------|----------|------------|
| 00 | / | / | Huang RJ | 2022.06.15 |

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless authorized. All rights reserved for patent, utility model or designs registrations. 非经明确授权, 否则禁止转让、复制、利用、交还本文件的内容。一经发现侵权, 侵权者将承担法律责任。本公司保留对涉及发明、实用新型和外观设计的所有权利。