


NOTES:

1. Electrical characteristics:
 - 1.1 Contact resistance: 30mΩ Max. Initial.
 - 1.2 Dielectric withstanding voltage: 500V AC(rms) for 1 minute.
 - 1.3 Insulation resistance: 500MΩ Min.
 - 1.4 Rated current: 1.5A.
2. Environment characteristics:
 - 2.1. Temperature range: -40°C~+85°C.
3. Materials:
 - 3.1 Terminal: Copper alloy Gold plating on nickel substrate.
 - 3.2 Rubber core: PBT, black, fire-retardant.

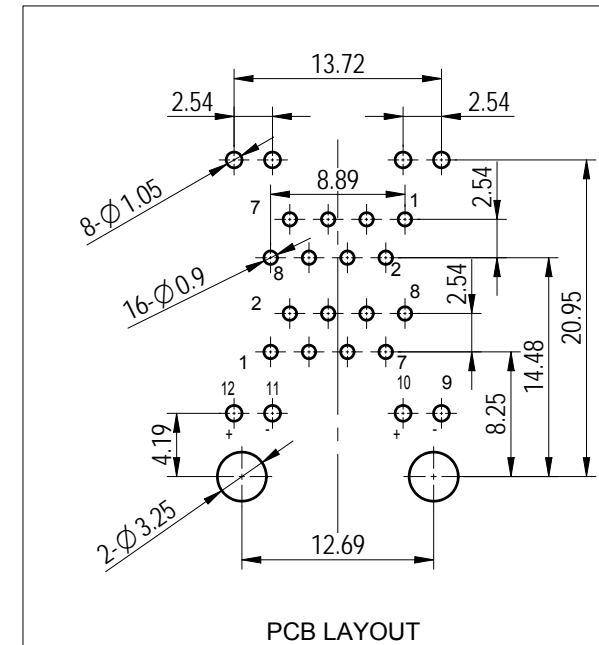

GENERAL TOLERANCE			MATERIAL:		SURFACE/COLOR:	
X.	±0.60		MAT NO./REV:		MAT STATUS: 批量	
X	±0.38	APPD: 兰春华	2023.08.14	NAME		
XX	±0.25	CHKD: 陈招	2023.08.14	DG1131-04-S8B0P2		
00		DRFT: 唐本恒	2023.08.14	DRAWING NO.	TYPE	DRAWING STATUS
REV	ECN	DATE		200035074	CUSTOMER DRAWING	已发布
						SCALE
						2:1
						SHEET
						1/1

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility model or design registrations. 除本册子明确授权外, 否则禁止再出、复制、引用、交流本文件的内容。 侵犯专利及设计权, 侵权者将承担赔偿责任。 本公司保留国内外发明专利的所有权利。