

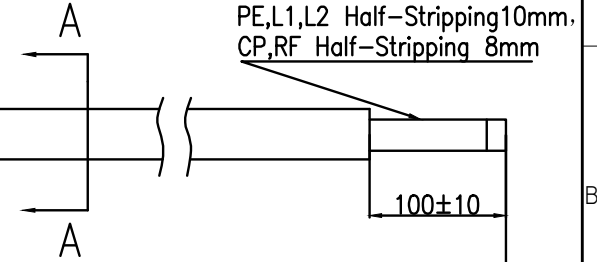
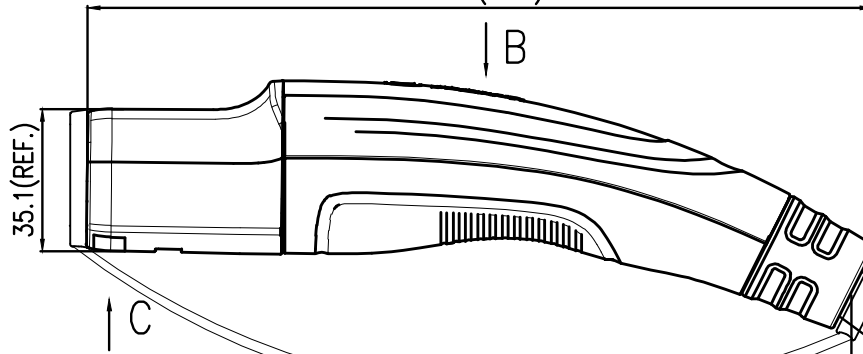


未注公差/General tolerances(mm)											0.1/10 ±2'		
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315		>315 ~ 400	>400 ~ 500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

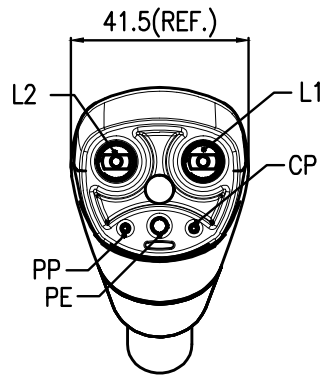

Wiring diagram

- L1 10AWG Brown
- L2 10AWG Blue
- CP 18AWG Red
- PP
- PE 10AWG Yellow/Green
- RF 22AWG Orange




R1 = 150Ω ± 3%

R2 = 330Ω ± 3%

Laser Printing Note:
 MTAC-S-032A-V3-03-5.0M-10AH
 16A 240V AC
 IP67
 20xxxxxx-xxxx

A-A

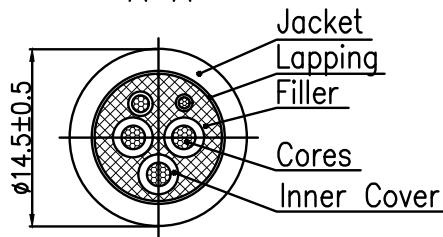

额定电压电流/Rated voltage/Current	240V AC/32A
绝缘电阻/Insulation resistance	>100MΩ, 500V DC 1min
耐压/Withstanding voltage	L1, L2 and PE ,2500V AC 1min L and L2 ,2500V AC 1min
防护等级/Ingress protection	IP67(body)
插拔寿命/Insertion/Pullout times	10,000 Times
插拔力/Insertion/Pullout force	<90N
使用温度范围/Operating temperature(°C)	-30~+50
线材规格/Cable specification	3*10AWG+1*18AWG+1*22AWG Black
标准/Reference standard	NACS,UL2251
符合RoHS环保要求/Conform to RoHS	Yes

		MATERIAL:	SURFACE/COLOR:			
		MAT NO./REV:	D0-1		MAT STATUS:	
APPD:		NAME				
CHKD:		MTAC-S-032A-V3-03-5.0M-10A(H)				
DRFT:	Zhang Q 2023.11.28	DRAWING NO.	TYPE	DRAWING STATUS	SCALE	SHEET
			CUSTOMER DRAWING		1:3	1/1

REV	ECN	DESCRIPTION	DRFT	DATE