
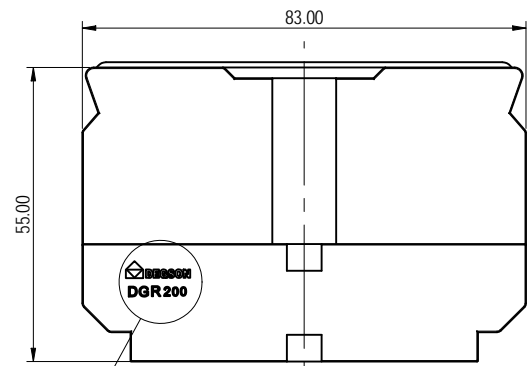


公差表(General tolerances:mm)													D 0.1/10	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400		>500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2

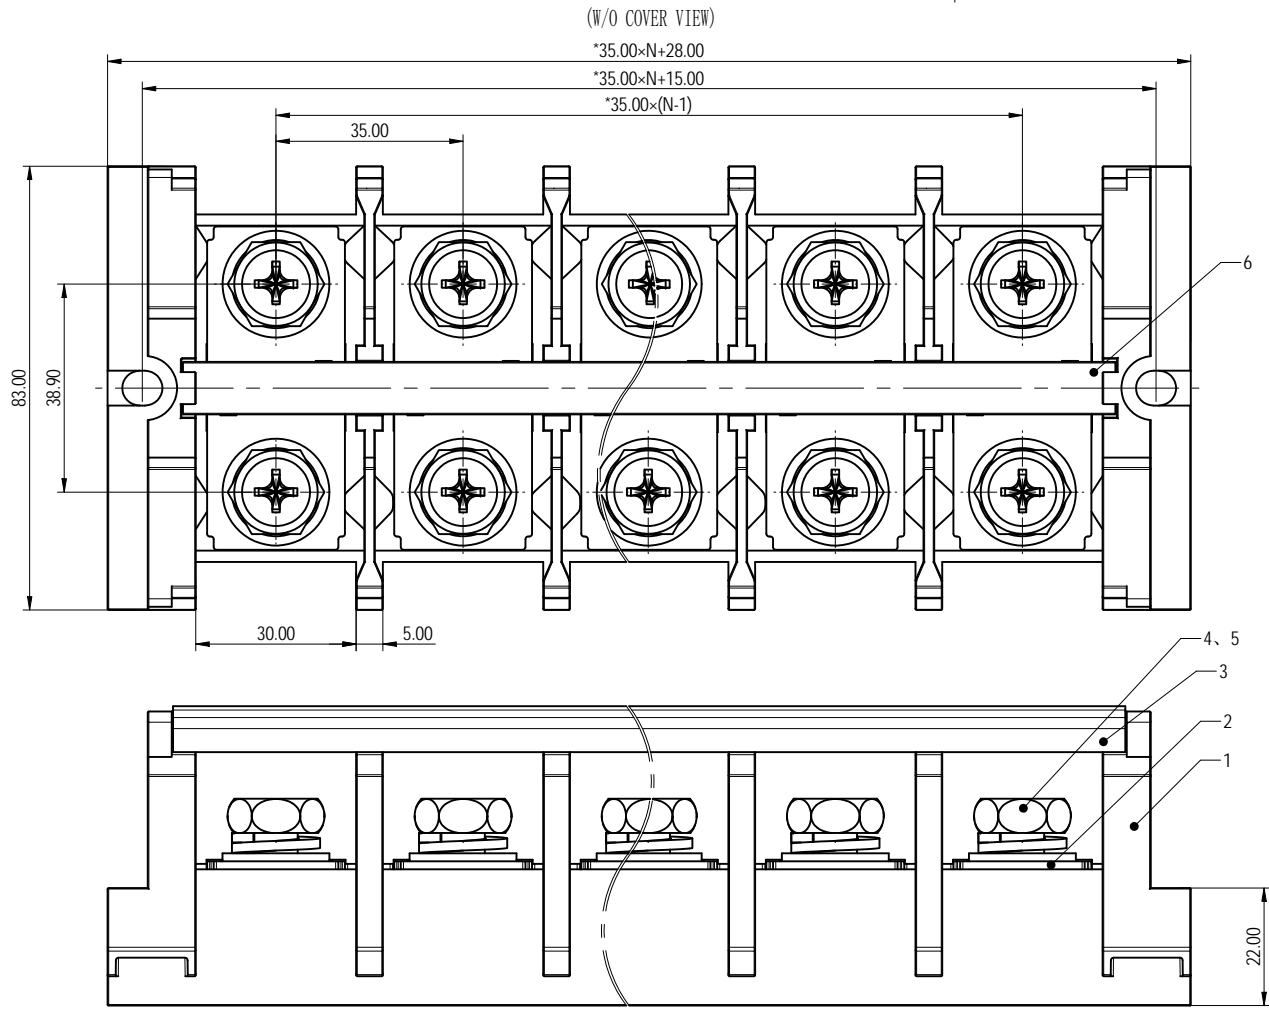

ITEM	NAME OF PART	MATERIAL	NOTES
6	Tag	PVC	UL94V-0
5	Nut	Steel	Zn Plated
4	Screw	Steel	Zn Plated
3	Cover	PC	UL94V-2
2	Current_carrier	Copper	Sn Plated
1	Housing	PA66+GF	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:			
额定电压/电压/Rated Voltage(V)/Current(A)		B	C
600/200		600/200	600/5
额定电流/Current			
600/200			
拧紧扭矩/Torque Tightening(N·m/Lb.in)		M10: 10.00/88.54	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG)		6-4/0	
间距/Pitch(mm)/线数范围/Poles		35.00/N=02-08P	
使用温度范围/Operating temperature(°C)		-40--+105	
符合RoHS环保要求/Conform to RoHS		Yes	

**DEGSON** MATERIAL: SURFACE/COLOR: / 00 MAT STATUS: 小批量

APPD: 蓝美凡 2023.12.21 NAME: DGR200-U-XXP-1Y-00Z(H)

CHKD: 曹利影 2023.12.21

DRAFT: 孙科豪 2023.12.21

DRAWING NO. 200262516 TYPE CUSTOMER DRAWING DRAWING STATUS 已发布 SCALE 1:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRAFT	DATE
00				

Transfer or duplication of this document as well as the utilization of its contents without the written permission of DEGSON is prohibited. All rights reserved for patent. 复制或再行发布此文件以及其内容之利用，未经 DEGSON 书面许可，均属侵权行为。DEGSON 保留所有权利。未经授权，不得复制或再行发布此文件及其内容。