


小袋包装





螺丝钉4pcs  
M3\*12

Dimensional tolerances(mm)				Length tolerances(mm)				0.1/10 ±2°
0	>30	>60	>100	0	>5000	>10000	>30000	
-	-	-	-	-	-	-	-	
±0.25	±0.35	±0.55	±0.80	±1.10	±55	±105	±205	

额定电压/电流/Rated Voltage/Current	250V / 1.5A
绝缘电阻/Insulation resistance	≥100MΩ
插拔次数/Mechanical working life(mating cycles)	30
使用温度范围/Operating temperature(°C)	-40~85
耐电压/Withstanding voltage	500V / 1min
防护等级/Ingress protection	IP67 (Mated)
线缆规格/Cable Specification	UL1569 20AWG
符合 RoHS 环保要求/Conform to RoHS	YES

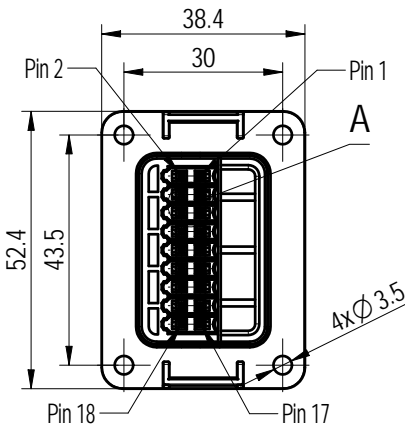



Conn. 1 [IP67 (Mating)]

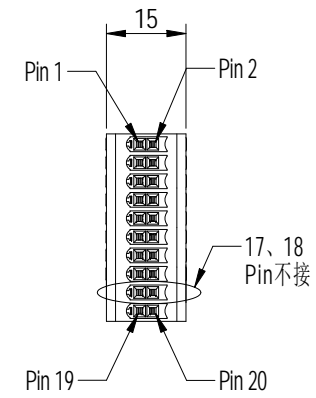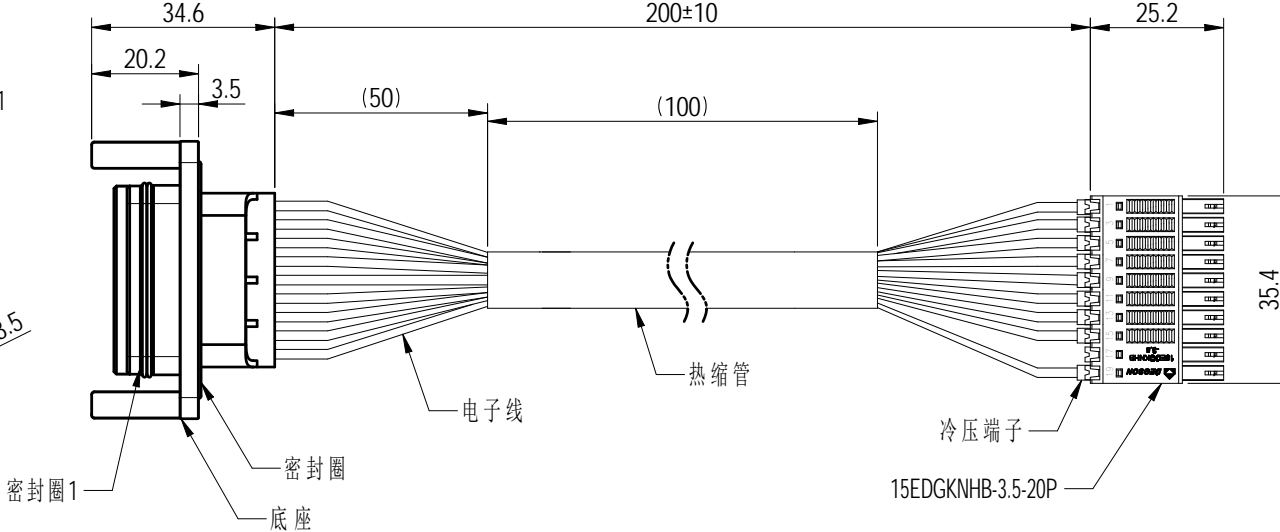

Conn. 2

18	UL1569 20AWG 灰/白	20
17	UL1569 20AWG 灰	19
16	UL1569 20AWG 紫/白	16
15	UL1569 20AWG 紫	15
14	UL1569 20AWG 橙/白	14
13	UL1569 20AWG 橙	13
12	UL1569 20AWG 绿/白	12
11	UL1569 20AWG 绿	11
10	UL1569 20AWG 黄/白	10
9	UL1569 20AWG 黄	9
8	UL1569 20AWG 蓝/白	8
7	UL1569 20AWG 蓝	7
6	UL1569 20AWG 红/白	6
5	UL1569 20AWG 红	5
4	UL1569 20AWG 棕/白	4
3	UL1569 20AWG 棕	3
2	UL1569 20AWG 黑/白	2
1	UL1569 20AWG 黑	1

Conn. 1	Wire Color	Conn. 2
	Pin Out	

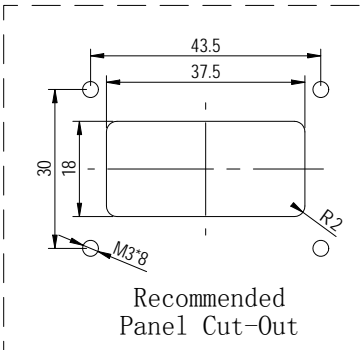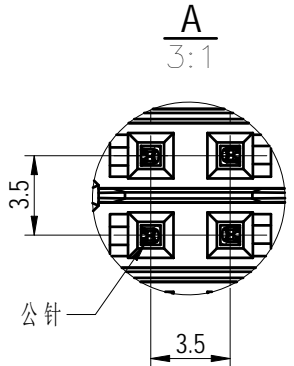

Recommended Panel Cut-Out

		MATERIAL:	SURFACE/COLOR:		
		MAT NO./REV: 29020000006-1 / 00.01	MAT STATUS: 小批量		
APPD:		NAME			
CHKD:		PV-ST-FM-PFC-18P-00Z (H)			
DRFT:		DRAWING NO. 200280106	TYPE CUSTOMER DRAWING	DRAWING STATUS work	SCALE 2:1 SHEET 1/1

Transfer or duplication of this document as well as the utilization or communication of its content are prohibited unless authorized in writing by Degson. All rights reserved for patent. 未经授权，禁止复制或传播本文件内容。如有侵权，必究。 除专利外，所有权利均保留。 除专利外，所有权利均保留。